


# PROTEC B2S(R) (2+0, 1+1) Conexiones




Multipolar  
Protector de Rayo Directo  
I<sub>imp</sub> = 12.5kA (10/350)/polo


Red TNS (Monofásica)	Dimensiones	Pase unitario	Código
PROTEC B2S 25/150 (2+0)	DIN 43880 2TE	240g	500 777
PROTEC B2S 25/275 (2+0)	DIN 43880 2TE	315g	500 779
PROTEC B2S 25/320 (2+0)	DIN 43880 2TE	330g	500 781
PROTEC B2S 25/385 (2+0)	DIN 43880 2TE	290g	500 821
PROTEC B2S 25/440 (2+0)	DIN 43880 2TE	295g	500 783
PROTEC B2SR 25/150 (2+0)	DIN 43880 2TE	250g	500 785
PROTEC B2SR 25/275 (2+0)	DIN 43880 2TE	325g	500 787
PROTEC B2SR 25/320 (2+0)	DIN 43880 2TE	340g	500 789
PROTEC B2SR 25/385 (2+0)	DIN 43880 2TE	300g	500 823
PROTEC B2SR 25/440 (2+0)	DIN 43880 2TE	305g	500 791

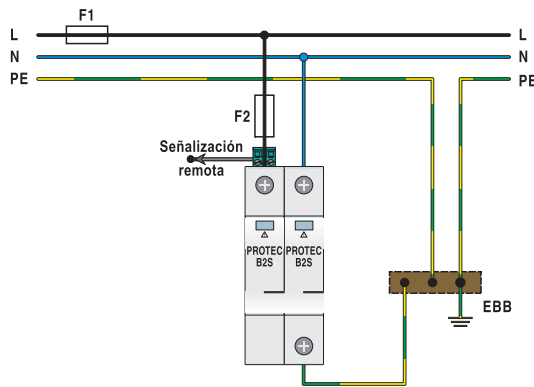


Red TT (Monofásica)	Dimensiones	Peso unitario	Código
PROTEC B2S 25/150 (1+1)	DIN 43880 3TE	375g	500 649
PROTEC B2S 25/275 (1+1)	DIN 43880 3TE	415g	500 651
PROTEC B2S 25/320 (1+1)	DIN 43880 3TE	425g	500 653
PROTEC B2S 25/385 (1+1)	DIN 43880 3TE	400g	500 829
PROTEC B2S 25/440 (1+1)	DIN 43880 3TE	405g	500 655
PROTEC B2SR 25/150 (1+1)	DIN 43880 3TE	385g	500 657
PROTEC B2SR 25/275 (1+1)	DIN 43880 3TE	425g	500 659
PROTEC B2SR 25/320 (1+1)	DIN 43880 3TE	435g	500 661
PROTEC B2SR 25/385 (1+1)	DIN 43880 3TE	410g	500 831
PROTEC B2SR 25/440 (1+1)	DIN 43880 3TE	415g	500 663

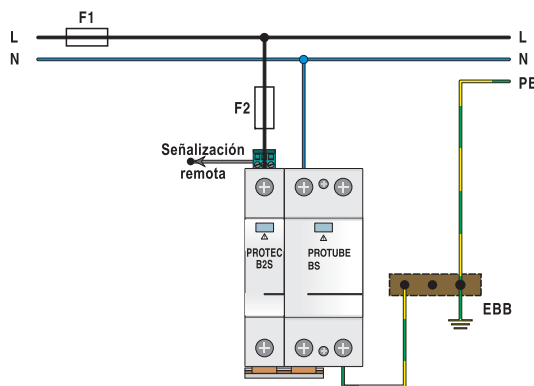


PROTEC B2S 25/xxx (2+0)



PROTEC B2SR 25/xxx (2+0)

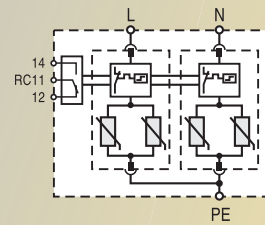

PROTEC B2S 25/xxx (1+1)



PROTEC B2SR 25/xxx (1+1)

