

# SPD for Explosive Environments

## RayDat Ex-2 Series

D1 • C1 • C2 • C3

SMH-xxEx Series



IEC/EN Category: D1/C1/C2/C3  
 Mode of Protection: Longitudinal, Transverse  
 Coarse Protection: 3 Terminal GDT  
 Voltages: 12, 24 V DC  
 Maximum Operating Voltage:  $U_c$ : 15, 28 VDC  
 Frequency Range: 3 MHz  
 Surge Discharge Ratings:  $I_n$ : 5 kA,  $I_{max}$ : 10 kA,  $I_{imp}$ : 1 kA  
 Series Load Current: 500 mA  
 Enclosure: DIN 43880 1/3TE, DIN Rail Mount  
 Terminals: Stranded to 4 mm<sup>2</sup>  
 Housing: Modular Design  
 Compliance: IEC/EN 61643-21



The RayDat Ex-2 Series is intended to provide protection to low voltage signal and data circuits located in potentially explosive environments.

It is intended for use on inherently safe circuits in accordance with ATEX directive. The protection module should be located as close to the end-user equipment being protected, as possible.

The circuit consists of a multi-stage protector providing both common (longitudinal) mode and differential (transverse) mode protection.

Coarse protection is provided using a three terminal gas discharge tube while fine protection is provided using a high speed bi-directional silicon stage. Care is taken to ensure coordination between these two stages without voltage or surge current blind spots occurring.

### Technical Data

Ex-2 Series		12V	24V
<b>Type</b>			
Intrinsic Safety Parameters			
Explosion Protected		II 1G Ex ia IIC T* Ga (-40 °C ≤ Ta ≤ +*°C)	
IEC Type Examination Certificate	Baseefa	Baseefa 15ATEX0028X Ex	
	IEC	IECEx BAS 15.0012X	
Maximum Input Voltage	$U_i$	16V	29V
Maximum Input Current	$I_i$	500 mA	
Maximum Input Power	$P_i$	2W	
Maximum Internal Capacitance	$C_i$	10 nF	
Maximum Internal Inductance	$L_i$	0.11 mH	
Number of Protected Pairs		1 (2 Conductors)	
<b>Electrical</b>			
Nominal Operating Voltage (DC)	$U_n$	12V	24V
Maximum Continuous Operating Voltage (DC)	$U_c$	15V	28V
Rated Load Current at 25°C	$I_L$	500 mA	
Nominal Discharge Current (8/20 μs)	$I_n$	5 kA	
Maximum Discharge Current (8/20 μs)	$I_{max}$	10 kA	
D1 Impulse Current (10/350 μs)	$I_{imp}$	1 kA	
Residual Voltage at 5 kA (8/20 μs)	$U_{res}$	< 145V	
Rated Spark Overvoltage	(Line-Line)	16-21V	31-37V
	(Line-Ground)	584-876V	
Response Time Overvoltage Protection	$t_A$	< 1 ns	
Insulation Resistance at $U_c$	$R_{iso}$	≥ 15 MΩ	≥ 28 MΩ
Insulation Resistance at 500 VDC	(Line-Ground)	> 1 GΩ	
Serial Resistance per Path	R	< 1 Ω	
Transverse Capacitance	C	< 10 pF	
Cut-off Frequency	$f_G$	3 MHz	
<b>Mechanical</b>			
Terminal Cross Section Multi-strand		4mm <sup>2</sup>	
Terminal Screw Torque		0.5 Nm	
Degree of Protection IEC/EN 60529		IP 20	
Housing Material		Thermoplastic; Beige; Extinguishing Degree V-0	
Mounting IEC/EN 60715		35 mm DIN Rail	
<b>Order Information</b>			
Order Code		12V	24V
Ex-2-xx		704 120	704 121

Input Power $P_i$	Temperature Class	Maximum Ambient
$P_i=1W$	T6	50 °C
$P_i=1.3W$	T5	55 °C
$P_i=2W$	T4	60 °C

$$U_o = U_i$$

$$I_o = I_i$$


$$P_o = P_i$$

## RayDat EX-2 Series


### Internal Configuration

#### Legend

- DB Diode Block
- F Fuse
- GDT Gas Discharge Tube
- L Inductor
- PG Protective Grounding
- R Resistor

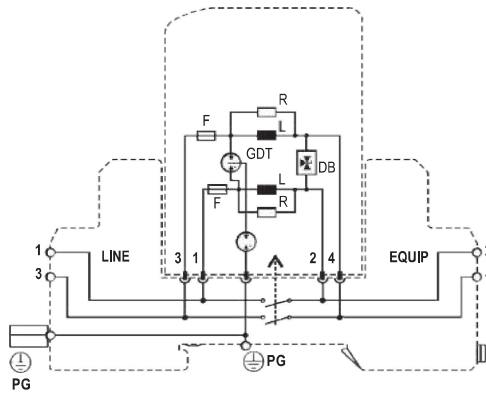

### Dimensions & Packaging

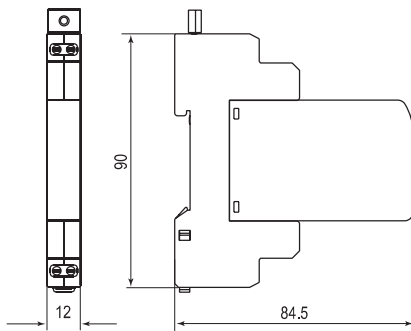

Ex-2 Series	12V	24V
<b>Dimensions</b>		
Weight per Unit	88 g	
Dimensions DIN 43880	2/3 TE	
Packaging Dimensions (Single Unit)	87 × 15 × 102 mm	
Minimum Package Quantity	15 pieces	